

HTE18-P4A2BB

SureSense

CYLINDRICAL PHOTOELECTRIC SENSORS





Ordering information

Туре	Part no.
HTE18-P4A2BB	1074755

Other models and accessories → www.sick.com/SureSense

Illustration may differ



Detailed technical data

Features

Sensor/ detection principle	Photoelectric proximity sensor, energetic
Dimensions (W x H x D)	16.2 mm x 48.5 mm x 31.8 mm
Housing design (light emission)	Hybrid
Thread diameter (housing)	M18
Sensing range max.	5 mm 600 mm ¹⁾
Sensing range	10 mm 200 mm ²⁾
Type of light	Visible red light
Light source	PinPoint LED ³⁾
Light spot size (distance)	Ø 12 mm (400 mm)
Wave length	631 nm
Adjustment	Potentiometer (Sensitivity)
Special features	Signal strength light bar

 $^{^{1)}}$ Object with 90 % reflectance (referred to standard white, DIN 5033).

 $^{^{\}rm 2)}$ Object with 6 % reflectance (referred to standard black, DIN 5033).

 $^{^{3)}}$ Average service life: 100,000 h at $\rm T_U$ = +25 °C.

Mechanics/electronics

Supply voltage	10 V DC 30 V DC ¹⁾
Ripple	< 5 V _{pp} ²⁾
Power consumption	20 mA ³⁾
Switching output	PNP ⁴⁾
Output function	Complementary
Switching mode	Light/dark switching ⁴⁾
Output current I _{max} .	≤ 100 mA
Response time	$\leq 0.5 \text{ ms}^{5)}$
Switching frequency	1,000 Hz ⁶⁾
Connection type	Male connector M12, 4-pin
Circuit protection	A ⁷⁾ B ⁸⁾ D ⁹⁾
Protection class	III ¹⁰⁾
Weight	18 g
Housing material	Plastic, VISTAL®
Optics material	Plastic, PMMA
Enclosure rating	IP67 IP69K
EMC	EN 60947-5-2 ¹¹⁾
Ambient operating temperature	-40 °C +70 °C
Ambient storage temperature	-40 °C +75 °C
UL File No.	E189383

 $^{^{1)}}$ Limit values when operated in short-circuit protected network: max. 8 A.

Classifications

ECI@ss 5.0	27270903
ECI@ss 5.1.4	27270903
ECI@ss 6.0	27270903
ECI@ss 6.2	27270903
ECI@ss 7.0	27270903
ECI@ss 8.0	27270903
ECI@ss 8.1	27270903

 $^{^{2)}\,\}mathrm{May}$ not exceed or fall below U_{V} tolerances.

³⁾ Without signal strength light bar and load.

⁴⁾ Q1 = light switching; Q2 = dark switching.

⁵⁾ Signal transit time with resistive load.

⁶⁾ With light/dark ratio 1:1.

 $^{^{7)}}$ A = V_S connections reverse-polarity protected.

⁸⁾ B = inputs and output reverse-polarity protected.

⁹⁾ D = outputs overcurrent and short-circuit protected.

 $^{^{10)}}$ Reference voltage: 50 V DC.

¹¹⁾ The sensor complies with the Radio Safety Requirements (EMC) for the industrial sector (Radio Safety Class A). It may cause radio interference if used in a residential area.

HTE18-P4A2BB | SureSense

CYLINDRICAL PHOTOELECTRIC SENSORS

ECI@ss 9.0	27270903
ETIM 5.0	EC001821
ETIM 6.0	EC001821
UNSPSC 16.0901	39121528

Connection diagram


Cd-243

$$\begin{array}{c|c} & & & \\ \hline & \\ \hline & & \\ \hline &$$

Characteristic curve

Red light


Operating reserve



- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 18 % remission
- $\ensuremath{\mathfrak{G}}$ Sensing range on white, 90% remission

Light spot size

Red light




Dimensions in mm (inch)

Sensing range	Vertical	Horizontal
170	4	4
(6.69)	(0.16)	(0.16)
270	7.5	5
(10.63)	(0.30)	(0.20)
500	18	10
(19.69)	(0.71)	(0.39)
600	22	12
(23.62)	(0.87)	(0.47)

Vertical
Horizonta

Sensing range diagram


Red light



0 100 200 300 400 500 600 700 (3.94) (7.87) (11.81) (15.75) (19.67) (23.62) (27.56) Distance in mm (inch)


- Sensing range
- Sensing range max.
- $\ \textcircled{1}$ Sensing range on black, 6% remission
- $\ensuremath{\mathfrak{G}}$ Sensing range on white, 90% remission

Functions

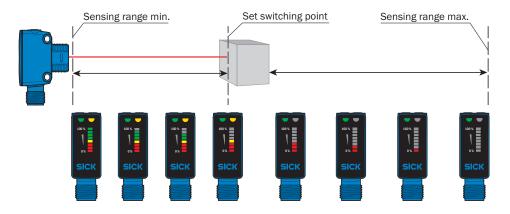

Dimensional drawing (Dimensions in mm (inch))

H18, DC, male connector M12



- ① LED indicator green: power on
- ② LED indicator yellow: Status of received light beam
- 3 Signal strength light bar
- ④ M3 mounting hole
- ⑤ Snap Connection for flush ring (sold seperatly)
- ⑥ Potentiometer (if selected) or LED Indicators

Recommended accessories

Other models and accessories → www.sick.com/SureSense

	Brief description	Туре	Part no.
Mounting brackets and plates			
	Mounting plate for M18 sensors, steel, zinc coated, without mounting hardware	BEF-WG-M18	5321870
40	Mounting bracket for M18 sensors, steel, zinc coated, without mounting hardware	BEF-WN-M18	5308446
	Bottom M18 mounting bracket SureSense sensors	MB-M18-H18	2085820
Other mounting accessories			
	Spherical bearing M18	Ball holder	4057409
	Mounting bracket	MB-BS18MM-M4	2049694
Terminal and alignment brackets			
	Clamping block for round sensors M18, without fixed stop, plastic (PA12), glass-fiber reinforced, mounting hardware included $\frac{1}{2} \frac{1}{2} \frac{1}{2}$	BEF-KH-M18	2051481

	Brief description	Туре	Part no.	
Plug connecto	Plug connectors and cables			
	Head A: female connector, M12, 4-pin, straight Head B: Flying leads Cable: PVC, unshielded, 2 m	DOL-1204-G02M	6009382	
	Head A: female connector, M12, 4-pin, straight Head B: Flying leads Cable: PVC, unshielded, 5 m	DOL-1204-G05M	6009866	
	Head A: female connector, M12, 4-pin, angled Head B: Flying leads Cable: PVC, unshielded, 2 m	DOL-1204-W02M	6009383	
	Head A: female connector, M12, 4-pin, angled Head B: Flying leads Cable: PVC, unshielded, 5 m	DOL-1204-W05M	6009867	

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

